




65" LCD MONITOR
MDT651S

- SLIM EYE-CATCHING BEZEL DESIGN
- ADVANCED HIGH-DEFINITION DIGITAL SIGNAGE DISPLAY
- FULL 1920 X 1080 NATIVE RESOLUTION
- BUILT-IN CAT5 TRANSMITTER AND RECEIVER
- RJ45 PORT FOR NETWORKED CONTROL
- FRONT AND REAR AMBIENT LIGHT SENSORS


LEADING THE EVOLUTION OF
HIGH-DEFINITION
DIGITAL SIGNAGE

65" LCD MONITOR MDT651S

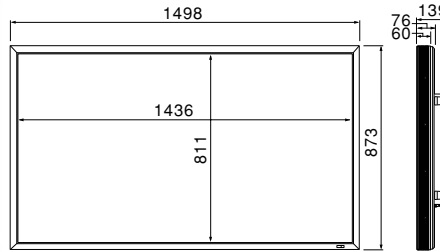

Unit: mm

MULTIPLE STANDARD INPUT AND OUTPUT CONNECTORS

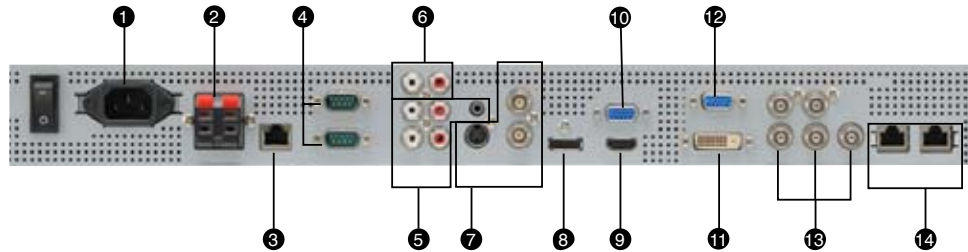

- ❶ Power in (3-pin, with earth terminal)
- ❷ External speaker terminals
- ❸ LAN (modular connector 8-pin)
- ❹ RS-232C (D-sub 9-pin)
- ❺ Audio in
- ❻ Audio out (RCA)
- ❼ Video I/O (BNC/S-terminal)
- ❽ RGB 6 in (DisplayPort)
- ❾ RGB 1 in (HDMI)
- ❿ RGB out (mini D-sub 15-pin)
- ⓫ RGB 2 in (DVI-D)
- ⓬ RGB 3 in (mini D-sub 15-pin)
- ⓭ RGB 4 in /DVD/HD in(BNC)
- ⓮ CAT5 I/O connectors(modular connector 8-pin)

CLASS	65" (Diagonal) LCD Monitor
VIEWABLE IMAGE SIZE	56.2" x 31.6"
ORIENTATION	Landscape / Portrait
BRIGHTNESS	700 cd/m ²
PIXEL PITCH	0.744 mm
CONTRAST RATIO	2500:1
DIMENSIONS (W x H x D in.)	59.0" x 34.4" x 5.5"
WEIGHT (WITHOUT STAND AND SPEAKERS)	104.9 lbs
BEZEL WIDTH	1.2"
RESPONSE TIME	8 ms (gray to gray)
VIEWING ANGLE	Horizontal and vertical: 178°
VIDEO/AUDIO INPUTS AND OUTPUTS	mini D-Sub 15 pin In/Out, HDMI, DVI-D, DisplayPort, CAT5 In/Out, BNC (R,G,B,H,V) In/out, S-Video, Composite (BNC, RCA), Audio LR (RCA), Audio Stereo mini jack
SPEAKER OUTPUT	External speaker jack
CONTROL INPUT/OUTPUT	RS232C (mini D-Sub 9 In/Out), LAN
POWER CONSUMPTION (WITHOUT SPEAKERS)	460 W
ESTIMATED BACKLIGHT LIFE	Up to 50,000 hours*
AUDIO SPEAKER	Optional: SPI-651S* or SP-521S
TABLE STAND	None available
WALL MOUNT COMPATABILITY	8-M8 Screws holes (200mm (7.9") pitches) for Monitor mount
WARRANTY	3-years parts and labor, Express Replacement Assistance, toll-free 24x7 technical support

*Results may vary depending on usage and operating environment.
Specifications subject to change without notice.

**SPI-651S available 4Q, 2010