



Epson EB-575W / EB-580 / EB-585W

Ultra-short-throw projectors with connectivity for the BYOD classroom







3 x Brighter Colours¹ and reliable performance – 3LCD, 3-Chip Technology. Look for both high colour brightness and high white brightness

One measurement of brightness is not enough – Look for both colour brightness and white brightness. The Epson EB-575W. 580 and 585W have: Colour Brightness: 2,700 to 3300 lumens²

White Brightness: 2,700 to 3300 lumens²

Amazing image quality – available in native XGA and WXGA (widescreen) resolutions

The ideal wall-mount installation – get a 93" (XGA) or 100" (WXGA) image from as little as 32cm away; significantly reduces shadow interference and glare

Convenient collaboration for BYOD classrooms – wirelessly share and compare students' work from multiple devices, simultaneously, with Moderator software³



Ultra-short-throw projectors with connectivity for the BYOD classroom.

The perfect ultra-short-throw projectors for today's BYOD classroom, the EB-575W, 580 and 585W deliver a whole new level of collaborative learning. With brilliant image quality, plus advanced network connectivity and wireless performance, these projectors make it easy to share engaging lessons and control the projector remotely. Offering 3x Brighter Colours¹ than competitive models, Epson 3LCD projectors ensure bright, vivid lessons. Available in both XGA and larger-than-life WXGA resolutions, these projectors deliver dynamic images that are sure to captivate any classroom. They can project 93" (XGA) or 100" (WXGA) images from just 32cm away.

And, they feature Moderator software³, so you can easily share and compare students' work from multiple devices, simultaneously.

Projectors at a glance



	EB-575W	EB-580	EB-585W
Resolution:	WXGA (1280 x 800)	XGA (1024 x 768)	WXGA (1280 x 800)
Colour Brightness:	2700 lumens ²	3200 lumens ²	3300 lumens ²
White Brightness:	2700 lumens ²	3200 lumens ²	3300 lumens ²

Amazing image quality









3x Brighter Colours with Epson¹

Brilliant image quality requires high colour brightness (colour light output), and Epson 3LCD projectors have 3x Brighter Colours than leading competitive projectors.1

One brightness measurement (lumens) is not enough. A projector's specification needs to show both high colour brightness and high white brightness. If colour brightness is lower than white brightness, images may be dark, dull and lose detail. If not provided, be sure to ask for a projector's colour brightness specification.







EPSON High colour brightness and high white brightness







COMPETITOR Colour brightness significantly lower than white brightness

Actual photographs of projected images from an identical signal source. Price, resolution and white brightness are similar for both projectors (Epson 3LCD and 1-chip DLP competitor). Both projectors are set to their brightest mode.



3LCD — The #1 projection technology in the world

- All 3LCD projectors have both high colour brightness and high white brightness
- All 3LCD projectors have 3 chips
- 25% lower power consumption for lower energy costs8
- 20 years of road-tested reliability





Remarkable resolution for brilliant clarity and detail

Resolution defines the level of detail and depth you'll see in a projected image. It's measured as the number of pixels wide by the number of pixels high. The more pixels, the better the detail. **Z**X more



SVGA (800 x 600)



1.5x more

XGA (1024 x 768) Ensures sharper detail



WXGA (1280 x 800) Offers high-definition and is ideal for widescreen (16:10) displays




Meets basic projection needs

Classroom collaboration

Teaching tools

Support BYOD classroom collaboration using Epson's Moderator feature³.

- Moderator (teacher) can display up to four different device screens simultaneously and control which device screens to display
- Connect to up to 50 Windows®, Mac®, iOS® or Android devices
- Encourage and control classroom collaboration; perfect for comparing students' work side-by-side

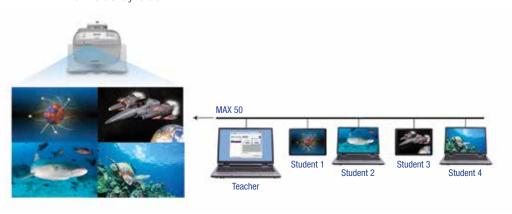

Advanced connectivity



EasyMP network projection



Free Epson iProjection App

Networking features that take teaching to the next level

- Manage up to 1024 Epson networked projectors using the included EasyMP[®]
 Monitor software or Crestron RoomView[®] saves time and money
- Update projector firmware in-house via the network, a USB cable or a USB flashdrive — eliminates the need for external service center repairs; saves time and money
- Send updates or announcements remotely to up to 1024 Epson networked projectors using the Message Broadcasting⁹ plug-in for EasyMP Monitor
- Connect your projector to an access point to share it with the entire class, without running more cables

Share from your tablet or smartphone

Display from your iOS or Android mobile device with the free Epson iProjection App and any nearby Epson projector.⁴

- Control your presentation with just a touch of the screen
- Advance through PowerPoint® or Keynote® presentations
- Zoom in and out of PDF, Excel® and Word documents
- Project Web pages and view brilliant, high-quality images
- 1 Compared to leading 1-chip DLP business and education projectors based on NPD data, July 2011 through June 2012. Colour brightness (colour light output) measured in accordance with IDMS 15.4. Colour brightness will vary depending on usage conditions.
- vary depending on tasage conditions.

 2 Colour brightness (colour light output) and white brightness (white light output) will vary depending on usage conditions. Colour light output measured in accordance with IDMS 15.4; white light output measured in accordance with ISO 21118.
- 3 Moderator feature is part of EasyMP Multi-PC Projection software.
- 4 Check your owner's manual to determine if a wireless LAN module must be purchased separately to enable wireless connection on your Epson projector. Epson projectors can be networked either through the Ethernet port on the projector (check model specifications for availability) or via a wireless connection. Not all Epson projectors are able to be networked. Availability varies depending on model.
- 5~ Includes one Mobile High-Definition Link $^{\!\scriptscriptstyle \oplus}$ (MHL) HDMI port.
- 6 EB-575W: ECO Mode is up to 10,000 hours, Normal Mode is up to 5000 hours. EB-580/585W: ECO Mode is up to 6000 hours, Normal Mode is up to 4000 hours. Lamp life will vary depending upon mode selected, environmental conditions and usage. Lamp brightness decreases over time.
- 7 9 out of 10 people preferred images from leading 3LCD projectors over leading 1-chip DLP business and education projectors. Leading projectors selected according to NPD data as of July 2013. Based on independent U.S. research conducted by Radius Research (July 2013).
- 8 Data source: ProjectorCentral.com Jan. 2013. Average of 1128 shipping models for which the manufacturers provided lumens and total power data, all resolutions and brightness levels. Energy efficiency was measured as wattage per lumen. It was measured for both 3LCD and 1-chip projectors in each of five brightness segments. 3LCD projectors averaged less required electricity per lumen in each of the five segments.
- 9 Works only with Epson projectors that support presentation over the network capability.

Easy to use








Simple Setup Suite from Epson

Epson projectors offer a suite of innovative features that ensure flexible placement and fast, easy setup.

- 2x HDMI supports multiple high-definition A/V devices. Compatible with the latest laptops, Blu-ray Disc® and media players
- MHL the latest in connectivity⁵
 - Display content from your MHL-enabled smartphones, tablets and streaming devices
 - Use the projector remote to control MHL-enabled devices
 - Charge your MHL-enabled device when it's plugged into the projector
 - Offers instant access to movies, games and more
- Quick Corner® this innovative feature allows you to move any of the four corners of an image independently, to adjust each corner for a perfectly rectangular picture
- Advanced 3-in-1 USB Plug 'n Play instant setup instantly project audio and video from a PC or Mac via a USB connection
- Quick, convenient control Instant Off® means no cool-down time required; it's ready to shut down when you are
- Copy menu settings for multiple projector installations save on installation time; copy settings via a USB flash drive, USB cable or LAN
- Flexible wall mount (included) easily install the projector with convenient adjustments, colour-coded dials and on-screen prompts. Wide cut-outs facilitate cable management

Easily conserve power

- ECO Mode operates the projector in a lower brightness setting
- Light Optimiser Mode adjusts the lamp brightness, based on the projected image
- Auto Mode sensor automatically adjusts the lamp brightness, based on the room environment
- ullet Sleep Mode (A/V Mute) control your presentation; it's right at your fingertips
- Direct Power On/Off power the projector on/off with the flip of a wall switch
- **Standby audio** even when the projector is in Standby Mode, you can use the projector's internal speaker or pass audio out to an external speaker

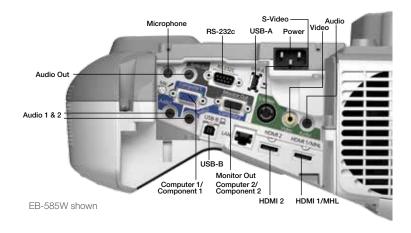

Epson EB-575W / 580 / 585W



Product Specification	ns		
Projection System	3LCD, 3-chip technology	INTERFACES	
Projection Method	Front/rear wall mount	Wireless LAN Port	802.11 b/g/n (optional – module sold separately)
Driving Method	Poly-silicon TFT Active Matrix	OTHER	, , ,
Pixel Number	,	Display Performance	NTSC: 480 lines, PAL: 576 lines (Depends on observation of
EB-580:	786,432 dots (1024 x 768) x 3		the multi-burst pattern)
EB-575W/585W:	1,024,000 dots (1280 x 800) x 3	Input Signal	NTSC/NTSC4.43/PAL/M-PAL/N-PAL/PAL60/ SECAM
Colour Brightness ²	Colour Light Output	Speaker	16 W (mono)
EB-575W: EB-580:	2700 lumens 3200 lumens	Operating Temperature	41° to 95°F (5° to 35°C)
EB-585W:	3300 lumens	Power Supply Voltage	$100 - 240 \text{ V} \pm 10\%$, 50/60 Hz
White Brightness ²	White Light Output	Power Consumption	
EB-575W:	2700 lumens	EB-575W:	318 W (Normal Mode), 230 W (ECO Mode)
EB-580:	3200 lumens		4.3 W Standby (Communication On) 0.44 W Standby (Communication Off)
EB-585W:	3300 lumens	EB-580/585W:	358 W (Normal Mode), 270 W (ECO Mode)
Aspect Ratio	4.0		4.3 W Standby (Communication On)
EB-580: EB-575W/585W:	4:3 16:10		0.44 W Standby (Communication Off)
Native Resolution	16:10	Fan Noise	35 dB (Normal Mode), 28 dB (ECO Mode)
EB-580:	1024 x 768 (XGA)	Security	Kensington®-style lock provision, padlock and security
EB-575W/585W:	1280 x 800 (WXGA)		cable hole, password protect function
Resize	640 x 580 (VGA), 800 x 600 (SVGA),	DIMENSIONS (W X D X H) Excluding feet:	367 x 375 x 155 mm
	1024 x 768 (XGA/575W and 585W only),	Weight:	5.3kg
	1152 x 864 (SXGA), 1280 x 800 (WXGA and 580 only),	REMOTE CONTROL	- Cloud
	1280 x 960 (SXGA2), 1280 x 1024 (SXGA3), 1280 x 768 (WXGA 60-1/580 only),	Features	Source search, video, LAN, computer, USB, power, aspect,
	1360 x 768 (WXGA 60-1) 360 dily),		colour mode, volume, e-zoom, A/V Mute, freeze, menu, page
	1400 x 1050 (SXGA+), 1600 x 900 (WXGA++)		up and down, help, auto, mouse functions, user, esc
Lamp Type		Operating Distance	Front/rear: 6 m
EB-575W:	215 W UHE	WARRANTY	0
EB-580/585W: Lamp Life ⁶	245 W UHE	EB-580 / 575W / 585W: Lamp Warranty:	3 years 1 year or 750 hours (whichever comes first)
EB-575W:	Up to 10,000 hours (ECO Mode)	WHAT'S IN THE BOX	1 year or 700 floars (whichever confice first)
ED OTOW.	Up to 5000 hours (Normal Mode)	WHAT O IN THE BOX	Epson EB-575W, 580 or 585W projector, wall mount,
EB-580/585W:	Up to 6000 hours (ECO Mode)		5m power cord, projector remote control, batteries, user
	Up to 4000 hours (Normal Mode)		manual CD, projector software CDs, Quick Setup Sheet,
Throw Ratio Range	0.04 0.40 EZEW/EDEW 0.07 0.07	ODDEDING INFORMATION	installation guide, template sheet
EB-580: Size (Projected Distance)	0.31 – 0.42, 575W/585W: 0.27 – 0.37	ORDERING INFORMATION	
FB-580:	55.9" to 93.2" (0.348 to 0.597 m)	Product Name FB-575W	V11H603053
EB-575W/585W:	60" to 100" (0.348 to 0.597 m)	FB-580	V11H604053
Keystone Correction Manual	Vertical ± 3 degrees; Horizontal ± 3 degrees	EB-585W	V11H602053
Mac Connectivity	Projector is Mac compatible via USB, DVI to HDMI or	Accessories	
	VGA adapter (not included), DP to HDMI or VGA	Genuine Epson lamp	V4.0H04.0L70
Contrast Ratio	Up to 10,000:1	EB-575W ELPLP79: EB-580/585W ELPLP80:	V13H010L79 V13H010L80
Colour Reproduction	Up to 1.07 billion colours	Replacement air filter ELPAF40:	V13H134A40
PROJECTION LENS		Connection and control box ELPCB02:	V12H614053
Type	No optical zoom/Manual focus	Active speakers ELPSP02:	V12H467053
F-number	1.80	Wireless 802.11b/g/n LAN unit ELPAP07: Quick wireless connection USB key ELPAP09:	
Focal Length	3.71 mm	DC-06 visualiser ELPDC06:	V12H321003
Zoom Ratio	Digital zoom 1.0 – 1.35	DC-12 visualiser ELPDC12:	V12H594053
	•	DC-20 visualiser ELPDC20:	V12H500053
		* Whichever comes first	

^{*} Whichever comes first





Epson is the registered trademark of Seiko Epson Corporation. All other names and company names used herein are for identification purpose only and may be the trademarks or registered trademarks of their respective owners. Epson disclaims any and all rights in those marks. All print samples shown herein are simulations. Specifications are subject to change without notice.

EPSON AUSTRALIA

3 Talavera Road North Ryde NSW 2113 Tel: (02) 8899 3666

www.epson.com.au

EPSON NEW ZEALAND

Level 2, 7-9 Fanshawe Street Auckland, 1010

Tel: (09) 366 6855 www.epson.co.nz ABN 91 002 625 783

04/14